




LGS Stake Mount

Moon Visions' new Large Ground Stake features a cast aluminum cap with our signature DuraLune™ Electrocoating applied. The Schedule 40 PVC is angle-cut for easy ground mount installation. Our flat aluminum cap provides the sleekest look for any upright application. The cap housing includes a custom-designed slot to house an LET75 electronic transformer (sold separately) inside for immediate conversion to low voltage.



- Suitable for Wet Locations
- Heavy wall, impact resistant Schedule 40 PVC
- Die Cast Aluminum Cap—Duralune Electrocoated & powder coated in Textured Black finish
- Threaded 1/2" NPT hub
- Slanted bottom accepts conduits of different depths
- 3" O.D. x 19" H
- Required for all BR series in 120 volt, and recommended for BR30 14 watt and BR40 22 watt series in 12 volts

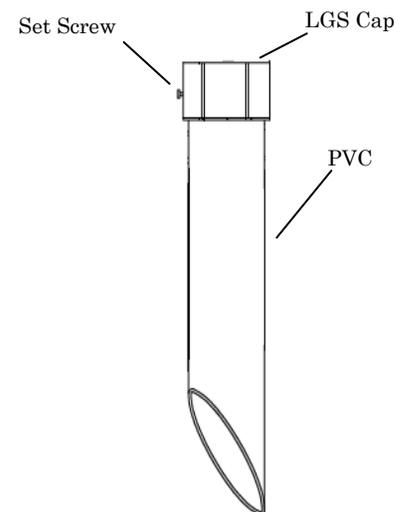

Installation Instructions

1. Install flexible conduit (required for 120V installations only).
2. Backfill against the PVC stake.
3. Install the fixture in the 1/2" threaded hole on the aluminum stake cap.
4. Pull the supply wires through the conduit.
5. Connect the supply wires with wire nuts (not provided). Connect white wire to white wire, black wire to black wire, and all of the ground wires together.
6. Place the fixture (already attached to the molded cap) atop of the PVC post and secure with set screw.

This mount is intended for installation in accordance with the National Electrical Code and local code specifications. Failure to adhere to these codes and instructions may result in serious injury and/or damage to the mount and will void the warranty. These instructions cover most installation applications. For any special applications not covered, please contact your distributor for assistance.